


A
REPORT ON
ASSEMBLED SCAFFOLDING LOAD TEST

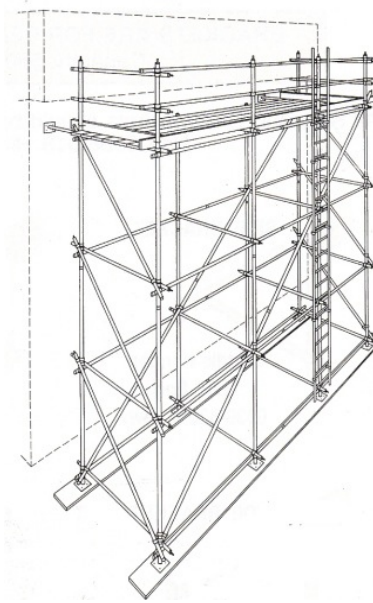

SUBMITTED TO:

CLIFF SCAFFOLDINGS (P) LIMITED

BRIEF

- Test : 1. Test on assembled scaffolding to draft AS/NZS 1576.3 : 1995, Appendix B.
2. One Test on 1200 mm transom to draft revision of AS/NZS 1576.3, Appendix C.
3. One test on each of three board of platform (hop-up) bracket -2 plank and 3 plank, to AS/NZS 1576.3: 1995, Appendix C. The loading specified by AS/NZS 1576.1: 2010 differs somewhat from that specified in AS/NZS 1576.1: 1995
- Description of Test : 1. Pressure Gauge, Range : 0-200 kg/cm² & 0-140 kg/cm²
Equipment : 2. Dial Guage, Range : 0-25 mm
3. Stop Watch, Range : 0-30 min
4. Vernier Caliper, Range : 0-200 mm
5. Measuring Tape, Range : 0-5 meter
6. Hydraulic Inner Pack, Range : 0-20 Ton
- Date of Testing : 18th March 2013
- Report Issued to : CLIFF SCAFFOLDINGS (P) LIMITED
- Test Conducted by : Bhupendra Singh
Diploma Engineering, B.Sc.,
5 yrs exp in Structures & Force Measurement.
- Supervised by : Mr. Umesh Gupta
B.Tech. Engineering, 15 yrs experience in Mechanical Testing,
Calibration of Force & structures

**Test-1 Assembled scaffold to proposed
draft revision of AS/NZS 1576.3
Appendix B.**